



TELESCOPING BOOM CRANE


SQ2SK1Q

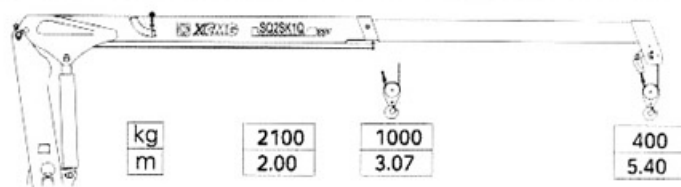


SQ2SK2Q

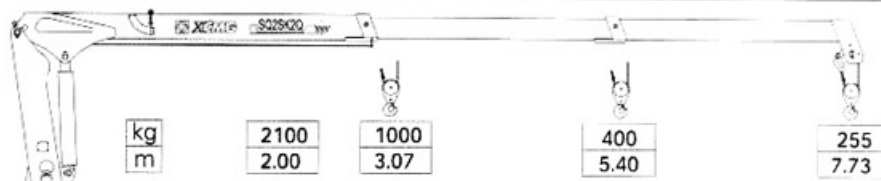


SQ3.2SK1Q

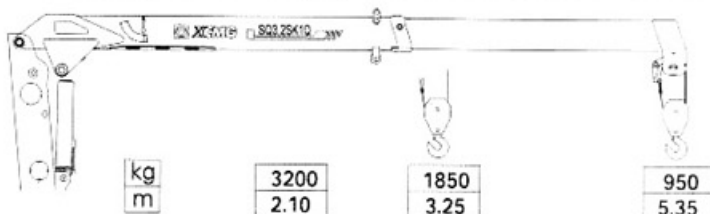


SQ3.2SK2Q

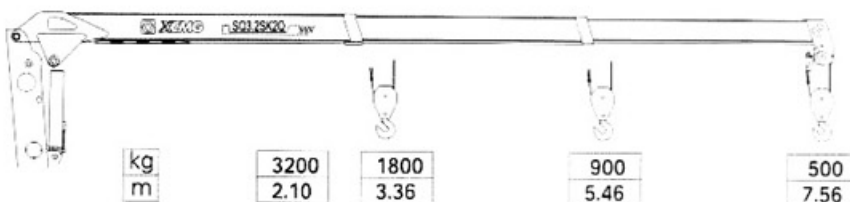


SQ4SK2Q

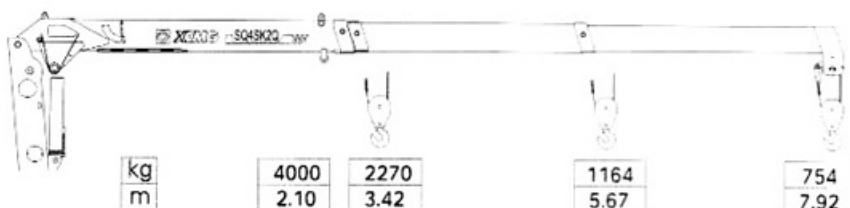

SQ5SK2Q

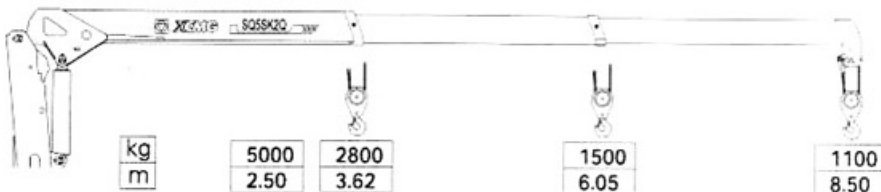


SQ5SK3Q

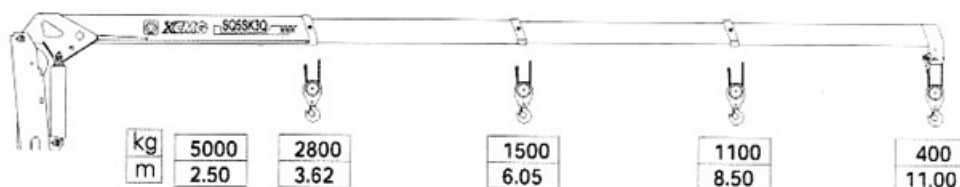


		SQ2SK1Q	SQ2SK2Q	SQ3.2SK1Q	SQ3.2SK2Q	SQ4SK2Q	SQ5SK2Q	SQ5SK3Q
Max Lifting Capacity	KG	2100	2100	3200	3200	4000	5000	5000
Max Lifting Moment	T · M	4.2	4.2	6.72	6.72	10	12.5	12.5
Recommended power	KW	9	9	10	10	14	18	18
Max Oil Flow Of Hydraulic System	L/MIN	20	20	25	25	25	32	32
Rated Pressure Of Hydraulic System	MPA	16	16	20	20	20	18	18
Oil Tank Capacity	L	25	25	60	60	60	90	90
Rotation Angle		ALL ROTATION	ALL ROTATION	ALL ROTATION	ALL ROTATION	ALL ROTATION	ALL ROTATION	ALL ROTATION
Crane Weight	KG	780	818	1172	1316	1350	2047	2170
Installation Space	MM	850	850	850	850	850	900	900


SQ6.3SK2Q

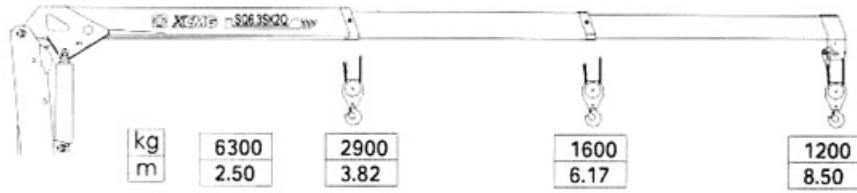


SQ6.3SK3Q

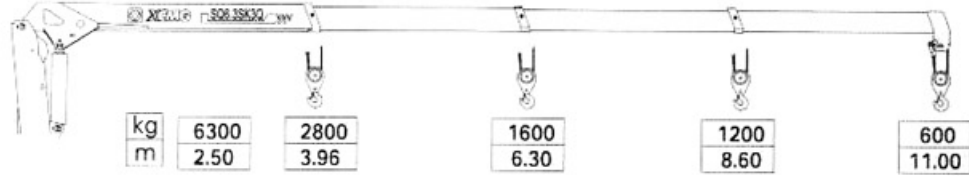


SQ8SK3Q

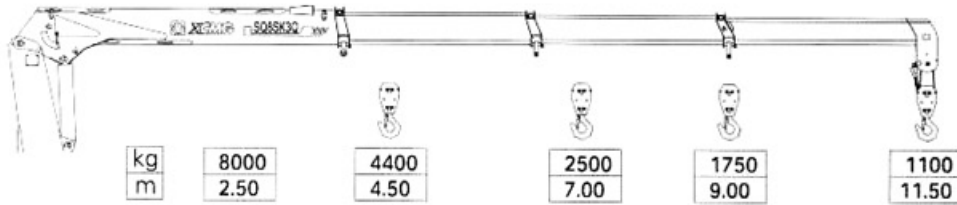


SQ10SK3Q

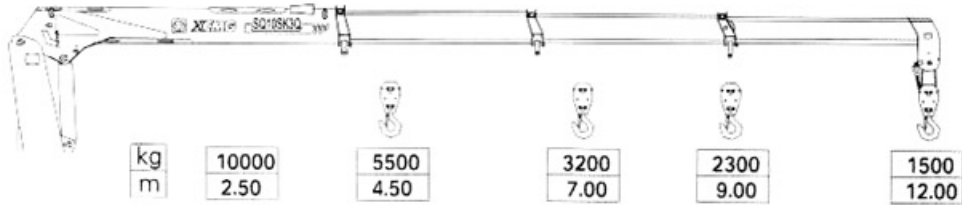

SQ12SK3Q

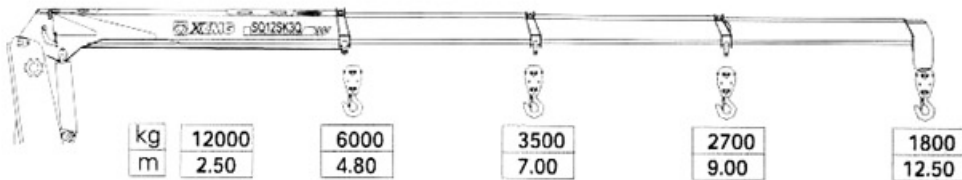

SQ16SK5Q

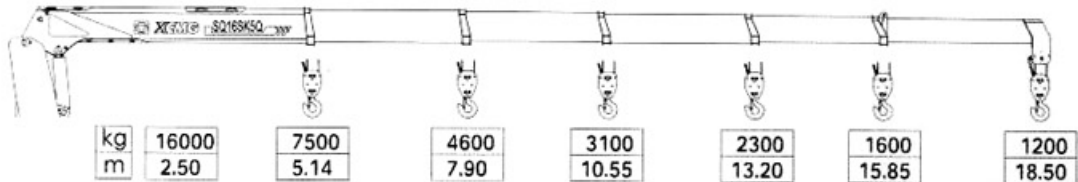


		SQ6.3SK2Q	SQ6.3SK3Q	SQ8SK3Q	SQ10SK3Q	SQ12SK3Q	SQ16SK5Q
Max Lifting Capacity	KG	6300	6300	8000	10000	12000	16000
Max Lifting Moment	T · M	15.7	15.7	20	25	30	40
Recommended power	KW	20	20	28	28	30	36
Max Oil Flow Of Hydraulic System	L/MIN	40	40	55	63	63	63
Rated Pressure Of Hydraulic System	MPA	20	20	27	26	26	28
Oil Tank Capacity	L	90	90	120	180	180	260
Rotation Angle		ALL ROTATION	ALL ROTATION	ALL ROTATION	ALL ROTATION	ALL ROTATION	ALL ROTATION
Crane Weight	KG	2117	2270	3300	3800	4200	6200
Installation Space	MM	900	900	1200	1150	1300	1400


(All specifications are subject to technical modifications without notice)

KNUCKLE BOOM CRANE


SQ1ZK2Q

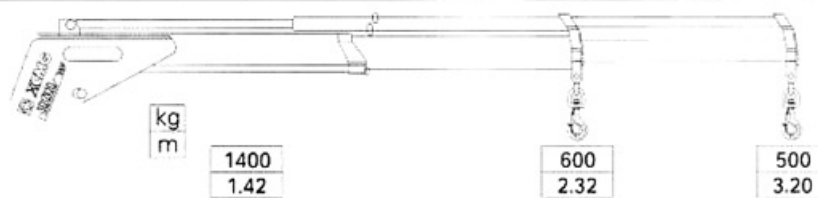


SQ2ZK1

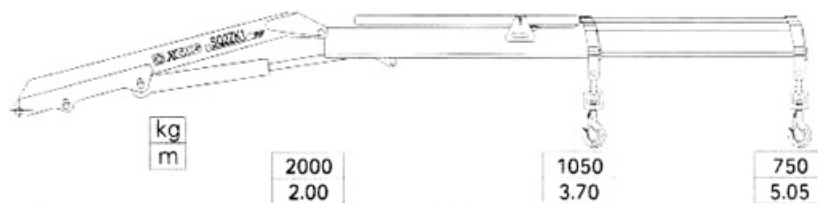


SQ3.2ZK1

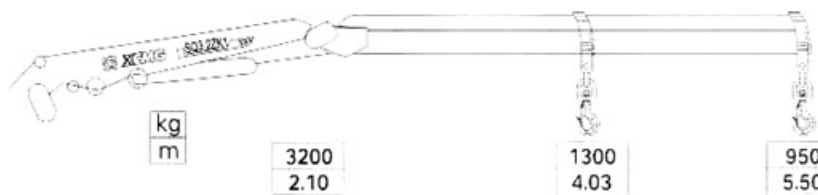


SQ3.2ZK2

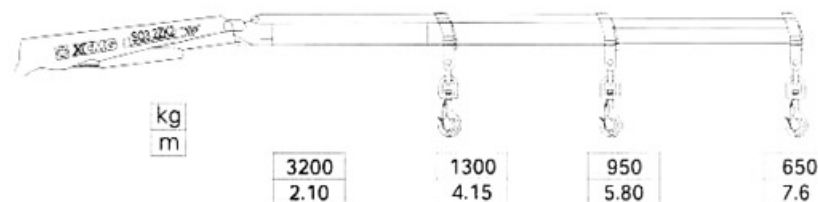


SQ4ZK2

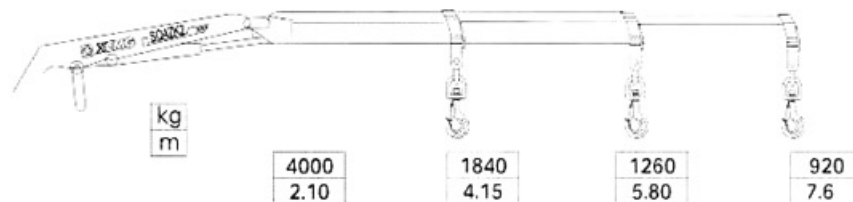

SQ5ZK2Q

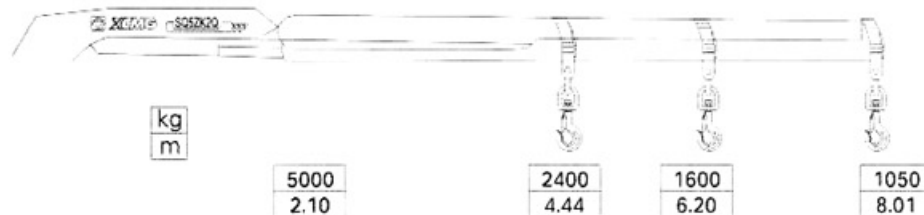


SQ5ZK3Q

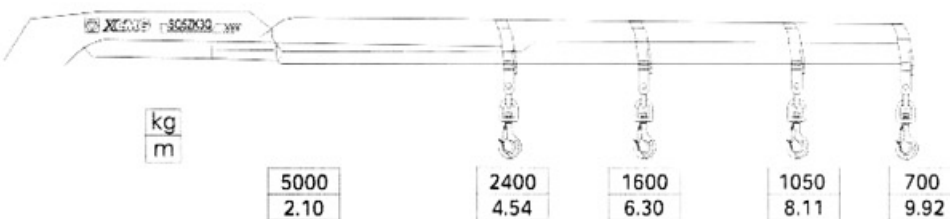


		SQ1ZK2Q	SQ2ZK1	SQ3.2ZK1	SQ3.2ZK2	SQ4ZK2	SQ5ZK2Q	SQ5ZK3Q
Max Lifting Capacity	KG	1000	2000	3000	3000	4000	5000	5000
Max Lifting Moment	T · M	2	4	6	6.72	8.4	10.5	10.5
Recommended power	KW	5.05	5.05	14	14	14	18	18
Max Oil Flow Of Hydraulic System	L/MIN	16	20	25	25	25	25	25
Rated Pressure Of Hydraulic System	MPA	20	22	22	26	26	28	28
Oil Tank Capacity	L	20	25	60	60	60	90	90
Rotation Angle		ALL ROTATION	370°	370°	370°	370°	ALL ROTATION	ALL ROTATION
Crane Weight	KG	450	850	1080	1109	1157	2011	2117
Installation Space	MM	550	850	850	850	850	1050	1150


SQ6.3ZK2Q

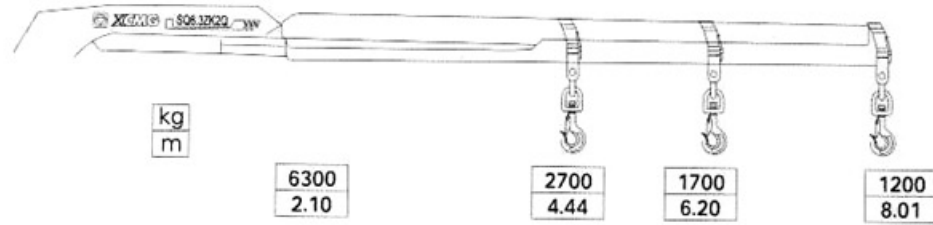


SQ6.3ZK3Q

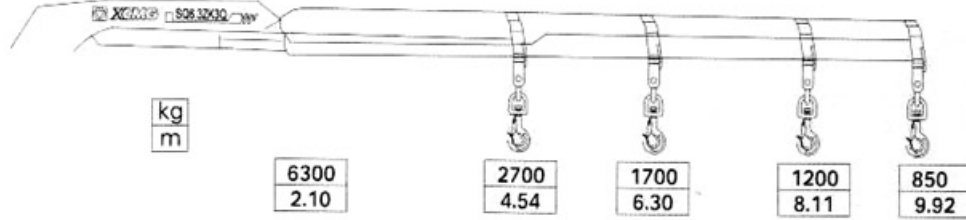


SQ8ZK3Q

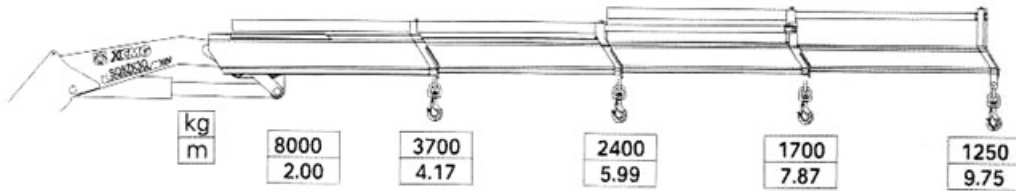


SQ10ZK3Q

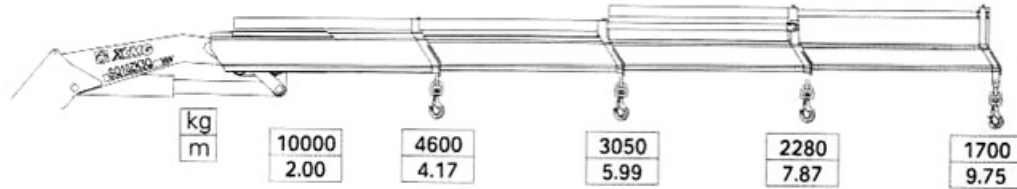

SQ12ZK3Q

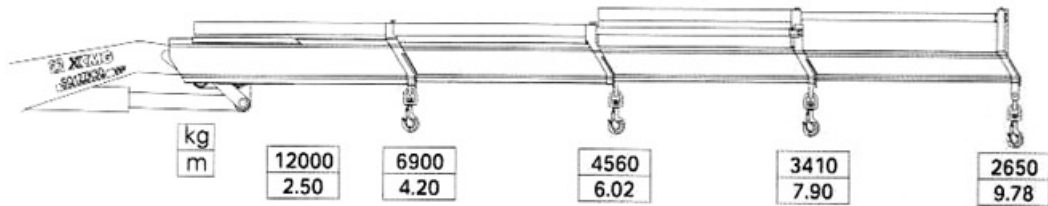

SQ16ZK4Q

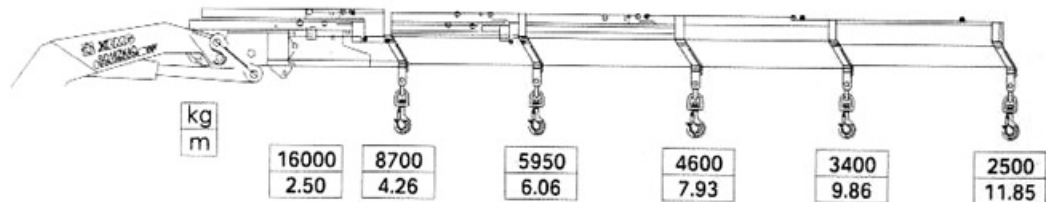

		SQ6.3ZK2Q	SQ6.3ZK3Q	SQ8ZK3Q	SQ10ZK3Q	SQ12ZK3Q	SQ16ZK4Q
Max Lifting Capacity	KG	6300	6300	8000	10000	12000	16000
Max Lifting Moment	T · M	13.23	13.23	16	20	30	40
Recommended power	KW	18	18	22	28	32	37
Max Oil Flow Of Hydraulic System	L/MIN	25	25	45	40	55	63
Rated Pressure Of Hydraulic System	MPA	28	28	26	28	30	30
Oil Tank Capacity	L	90	90	130	140	220	250
Rotation Angle		ALL ROTATION	ALL ROTATION	ALL ROTATION	ALL ROTATION	ALL ROTATION	ALL ROTATION
Crane Weight	KG	2115	2226	2500	3477	4130	5600
Installation Space	MM	1050	1050	1150	1150	1400	1500

(All specifications are subject to technical modifications without notice)